



Safety modules for motor standstill monitoring

Main features

- For safety applications up to SIL CL 2/PL d
- Select from 10 different residual voltages on motor standstill
- Galvanic separation between control circuit and measurement circuit
- 45 mm housing
- 2 NO safety contacts
1 NC auxiliary contact
- 2 semiconductor outputs:
 - 1 signalling output for failure state
 - 1 signalling output for switching state of safety relays
- Possibility to connect single-phase or three-phase motors to measuring circuits
- Supply voltages: 24 ... 230 Vac/dc

Utilization categories

Alternating current: AC15 (50...60 Hz)

U_e (V) 230

I_e (A) 3

Direct current: DC13 (6 oper. cycles/min.)

U_e (V) 24

I_e (A) 4

Quality marks:



EC type examination certificate: IMQ CS 487 DM

UL approval: E131787

CCC approval: 2021000305000107

EAC approval: RU C-IT.YT03.B.00035/19

Compliance with the requirements of:

Machinery Directive 2006/42/EC,

EMC Directive 2014/30/EC,

RoHS Directive 2011/65/EU.

Technical data

Housing

Polyamide housing PA 66, self-extinguishing V0 acc. to UL 94

Protection degree acc. to EN 60529:

IP40 (housing), IP20 (terminal strip)

Dimensions:

see page 415, design C

General data

SIL level (SIL CL) up to:

SIL CL 2 acc. to EN 62061

Performance Level (PL) up to:

PL d acc. to EN ISO 13849-1

Safety category up to:

cat. 3 acc. to EN ISO 13849-1

Safety parameters:

see page 481

Ambient temperature:

-25°C...+55°C

Mechanical endurance:

>10 million operating cycles

Electrical endurance:

>100,000 operating cycles

Pollution degree:

external 3, internal 2

Rated impulse withstand voltage (U_{imp}):

4 kV

Rated insulation voltage (U_i):

250 V

Overvoltage category:

II

Supply

Rated supply voltage (U_n):

24 ... 230 Vac/dc; 50...60 Hz

Max. DC residual ripple in DC:

10%

Supply voltage tolerance:

±15% of U_n

Power consumption AC:

< 6 VA

Power consumption DC:

< 2 W

Input circuit

Voltage between terminals L1-L2-L3:

0 ... 690 V

Frequency:

0 ... 3 kHz

Input impedance:

>1 MΩ

Started motor threshold voltage:

from 20 mV to 500 mV adjustable in 10 increments

Stopped motor threshold voltage:

half the motor threshold voltage with

motor in operation

Maximum input impedance Y1-Y2:

< 20 Ω

Current in STARTY1-Y2 circuit:

70 mA (typical)

RESET input voltage:

24 Vdc ± 20%

RESET input current:

10 mA (typical)

Control circuit

Response time t_A:

< 3 s

Release time t_{R1}:

< 200 ms

Release time in absence of power supply t_{R2}:

< 3 s

Simultaneity time t_{c1}, t_{c2}:

3 s

Test:

Self-test upon activation of the supply voltage

and after activation of the RESET input.

Test duration:

2.5 s (During the test, the voltage in the measurement circuits must be less than the threshold voltage of the motor while at a standstill)

In compliance with standards:

EN 60204-1, EN ISO 14118, EN ISO 12100, EN 60529, EN 61000-6-2, EN 61000-6-3, EN 61326-1, EN 60664-1, EN 60947-1, EN IEC 63000, EN ISO 13849-1, EN ISO 13849-2, EN 62061, UL 508, CSA C22.2 No. 14, GB/T14048.5

Output circuit

Output contacts:

2 NO safety contacts, 1 NC auxiliary

contact

forcibly guided

gold-plated silver alloy

230/240 Vac; 300 Vdc

6 A

6 A

36 A²

10 mA

≤ 100 mΩ

4 A

PNP outputs galvanically separated,

overvoltage and short-circuit protected

24 Vdc

50 mA

24 Vdc ±20%

Switching voltage:

Switching current:

External supply voltage:

The number and the load capacity of output contacts can be increased by using expansion modules or contactors. See pages 355-364.

Code structure

article options
CS AM-01VE01-TC00UR1

Threshold voltage for motor at standstill

20-500 mV (standard)

UR1 45-750 mV

Connection type

V Screw terminals

M Connector with screw terminals

X Connector with spring terminals

Simultaneity time (t_c)

3s (standard)

TC00 infinite at standstill (t_c)

TA00 infinite on startup and standstill(t_c)

TD0 infinite on standstill and minimum activation time (t_A)

Features approved by UL

Rated supply voltage (U_n): 24 ... 230 Vac/dc; 50 ... 60 Hz

Power consumption AC: < 9 VA

Power consumption DC: < 2 W

Relay output:

Electrical ratings: 230/240 Vac

6 A general use

C300 pilot duty

Semiconductor output: 24 Vdc, 50 mA

Motor input: up to 600 V

Notes:

- For use in pollution degree 2 environment

- Use 60 or 75°C copper (Cu) conductor and wire size No. 30-12 AWG, stranded or solid.

- The terminal tightening torque of 5-7 lb in.

- Pour une utilisation dans un environnement de degré de pollution 2.


- Utiliser des conducteurs en cuivre (Cu) 60 ou 75°C rigides ou flexibles de section 30-12 AWG.

- Couple de serrage des bornes de 5-7 Lb In.




Safety module CS AM-0

Pin assignment

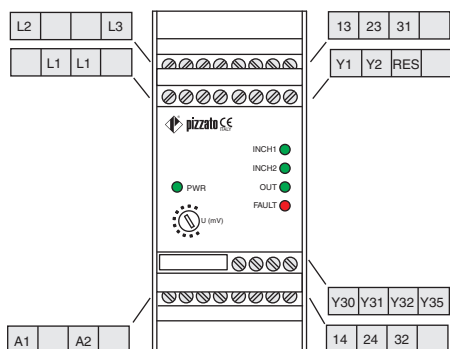


Internal wiring diagram

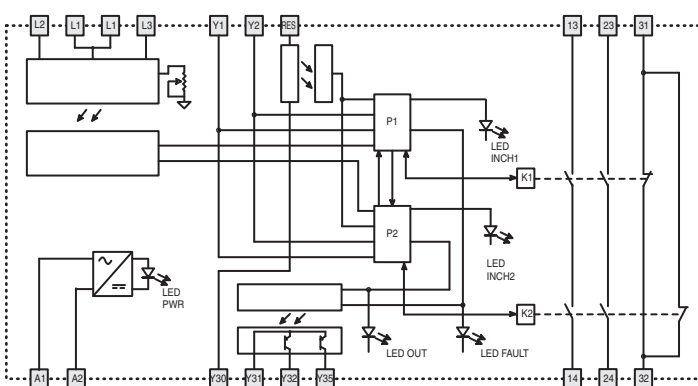


Function diagrams

Normal operation

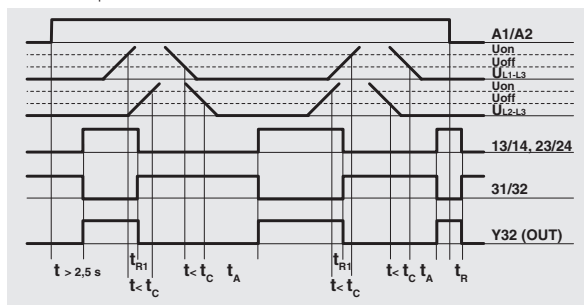

Reset (RES) operation

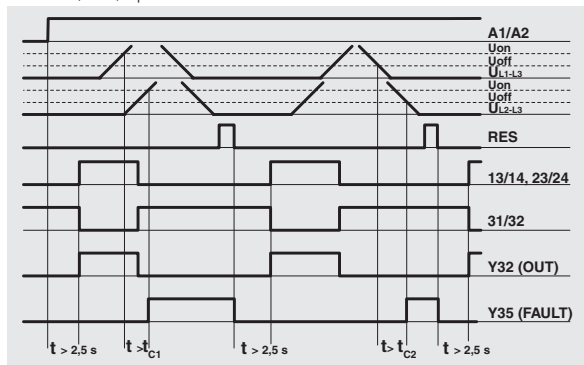


Legend:


- $t_{C1, C2}$: Simultaneity time
- t_A : response time
- t_{R1} : release time
- t_R : release time in absence of power supply

Input configuration

Single-phase motor

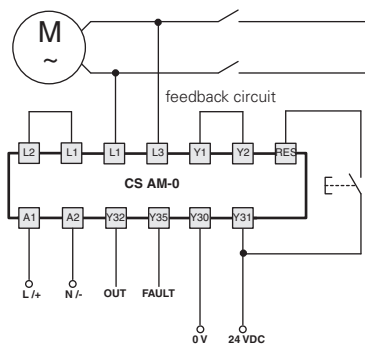

Three-phase motor

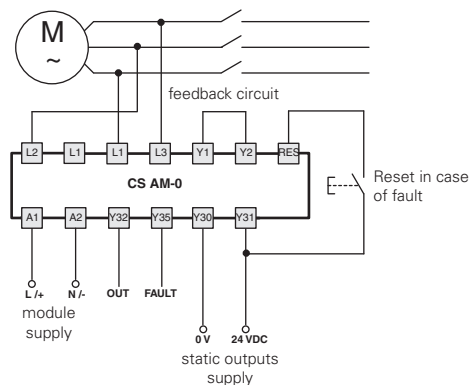

Δ \triangle In case of star/delta starting, connect the module to the ends of a single winding
 For dc motors connect + with L1 and - with L3.
 For single-phase connections, connect the phase with L1 and the neutral with L3.
 The diagram does not show the exact position of the terminals in the product

Application example on page 367.