

Thin type thermocouple temperature transducer

Model TH-2C, 5C

NEW!



Input Specification

Thermocouple (JIS C1602-1995)

Code	Sensor	Input	No.Y Limit of specifications
J0	J	0 to 1000°C	-50 to 1000°C Span:200 to 1050°C
JY		Other than the above	
K2	K	-50 to 200°C	-50 to 1200°C Span:200 to 1250°C
K3		0 to 200°C	
K4		-50 to 1200°C	
K5		0 to 1200°C	
KY		Other than the above	
R0	R	0 to 1700°C	0 to 1700°C Span:400 to 1700°C
RY		Other than the above	
T0	T	-50 to 350°C	-50 to 350°C Span:200 to 400°C
T1		0 to 350°C	
TY		Other than the above	
S0		S	
SY	Other than the above		

Allowable input value:-50 to 150% F.S

Output Specification

Code	Output	Load resistance
0	0 to 5V DC	More than 2KΩ
1	1 to 5V DC	
2	0 to 10V DC	More than 4KΩ Negative output:more than 10kΩ Less than 550Ω
3	-10 to 10V DC	
A	4 to 20mA DC	
Y	Other than the above	

For code No.Y limit of specifications

Voltage output:-10 to 10V DC

Minimum span:1 to 20V

Current output:0 to 20mA DC

Minimum span:1 to 20mA

General Specifications

Base accuracy: ±0.2% F.S (at 25±2°C)

Load resistance variation: ±0.06% F.S

Power supply variation: ±0.06% F.S

Temperature characteristic: ±0.02% F.S/°C

Accuracy of cold junction compensation: ±1°C (10 to 30°C)

±2°C (Other than 10 to 30°C)

Response time: 200msec TYP (0 → 90%)

Disconnection detection: Upside (135±15%F.S)

Front adjustments: More than ±5%F.S (zero, span)

Insulation resistance: Between the input and output/power supply
More than 100MΩ at 500V DC

Dielectric strength: Between the input and output/power supply
For 1 min. at 1500V AC

Power supply voltage: 100 to 240V AC ±10%
24V DC ±10%

Consuming current: Less than 20mA (at 100V AC)
Less than 50mA (at 24V DC)

Operating ambient temperature : -5 to 50°C

Operating ambient humidity : Less than 90%RH (No-condensing)

Storage temperature : Within -10 to +70°C

Storage humidity : Less than 60%RH (No-condensing)


Case material : Black PC 94V-2

Weight : Approx. 80g

Features


- AC power supply 100 to 240V AC
- DIN rail mounting
- Input/Output/Power supply isolated

Ordering Code

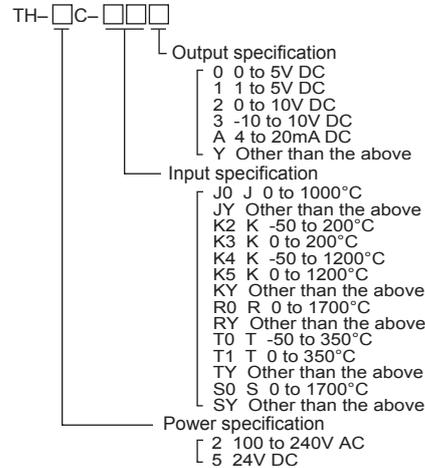


Example : TH- 5 C- [K] [3] [2]

Dimensions

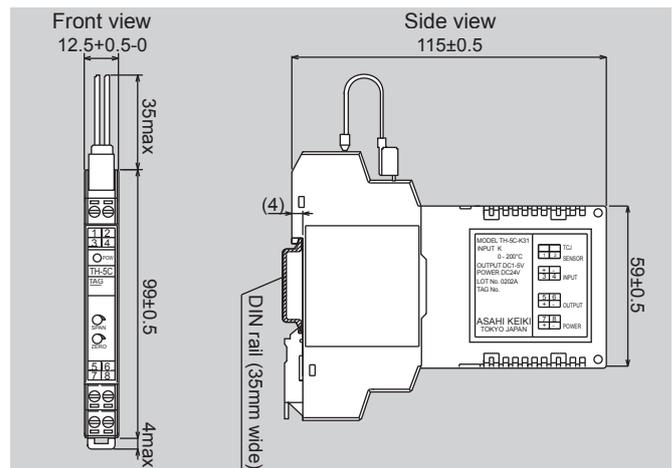

Connection Diagram

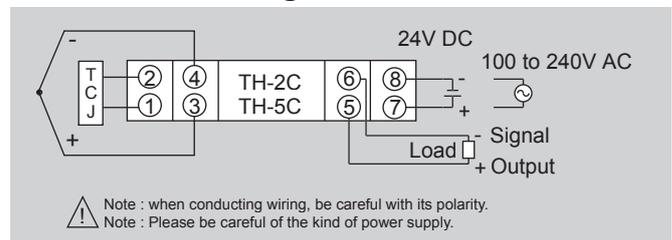

Block Diagram

